



# SINGLESERVE™ OVAL



## NEW CLEAR SINGLE-SERVE CONTAINER

A new single-serve container that offers on-the-go convenience and portability.

### KEY FEATURES AND BENEFITS

- Clear container for added consumer appeal
- Diaper (3 sided) IML decoration
- Sturdy spoon available
- Tinted lid available
- Film-sealable container
- Freezable polypropylene with high impact resistance
- Microwave and dishwasher safe

### CERTIFICATIONS

The raw materials used are tested according to ASTM standards for polymers, are approved for food contact and meet FDA (Food and Drug Administration, USA) and HPB (Health Protection Branch, Canada) regulations.



IMS

### MATERIAL

Containers, lids and IML labels are made of 100% recyclable polypropylene (PP).



### DECORATION AVAILABLE

- **Container:**  
Diaper (3 sided) IML decoration
- **Lid:**  
Full IML

### MINIMUM ORDERS AND INFORMATION

For details on minimum order quantities or for any other additional information, please contact IPL customer care at 1-800-463-0270 or visit our web site at [www.ipl-plastics.com](http://www.ipl-plastics.com).

### COLOR CODE

BASE COLORS	STANDARD COLORS	OTHER COLORS*
Natural 000	Black 099	Available upon request
White 001	Yellow 012	
Clear 002	Orange 021	Tinted colors available
	Red 485	
	Green 377	
	Blue 293	




Our containers are reusable and 100% recyclable because at IPL, we care about the environment.





### CONTAINER

PRODUCT CODE	MODEL	CAPACITY UNDER LID		APPROX. WEIGHT		A OVERALL HEIGHT		B OVERALL LENGHT		C OVERALL WIDTH		ITEMS PER BOX	BOXES PER PALLET	ITEMS PER PALLET	ITEMS PER 53 FT. TRUCKLOAD
		US oz.	ml	oz.	g	in.	mm	in.	mm	in.	mm				
22534	Oval 7oz.	6.75	200	8.0	0.28	1.40	35.56	4.95	125.73	3.25	82.55	1,638	25	40,950	491,400

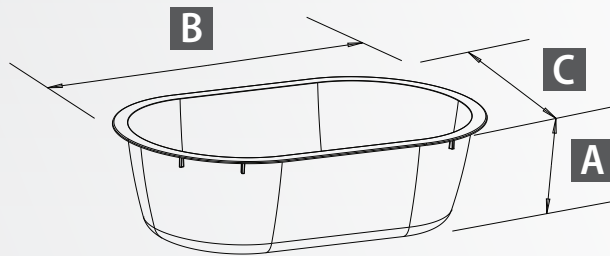

### LID

PRODUCT CODE	MODEL	APPROX. WEIGHT		OVERALL HEIGHT		OVERALL LENGHT		OVERALL WIDTH		ITEMS PER BOX	BOXES PER PALLET	ITEMS PER PALLET
		oz.	g	in.	mm	in.	mm	in.	mm			
20134	Oval Lid 7oz.	0.30	5.7	0.45	11.43	4.95	125.73	3.30	83.82	1,302	25	32,250

### RECOMMENDATIONS

Handling conditions vary from customer to customer. We recommend validating your processes (filling, conveying, warehousing and any others that might affect the purchased part) prior to use. Product usage temperature is between -9.4°F (-23°C) and 179.6°F (82°C) depending on resin grade.

### WARRANTIES

- Some chemicals can affect the integrity of the products. Any product requiring a Safety Data Sheet (SDS) has to be submitted and approved by IPL. If buyer fails to adhere to this clause, the related product guarantees will be void.
- Specifications may vary slightly over time. Please contact your IPL representative to ensure you have the most recent information.
- The information presented herein was prepared at IPL Inc. by qualified technical personnel. To IPL's knowledge, it is true and accurate. However, the information and recommendations are provided for these products with the understanding that the purchaser or user will independently determine that the product is suitable for the intended use, and that such use, complies with all applicable laws and regulations. The data represents typical values submitted only for the user's information and consideration and does not constitute a warranty of any kind.

