



SEALPACK™ ROUND SELECT



NEW DAIRY CONTAINERS ARE ON THE WAY!

A new family is born, 18 oz and 26 oz film-sealable dairy containers made for your application.

KEY FEATURES AND BENEFITS

- Easy transition from any 409 opening
- Photo quality IML graphics
- Modern design
- Film-sealable containers
- IML on containers and lid

CERTIFICATIONS

The raw materials used are tested according to ASTM standards for polymers, are approved for food contact and meet FDA (Food and Drug Administration, USA) and HPB (Health Protection Branch, Canada) regulations.



MATERIAL

Containers, lids and IML labels are made of 100% recyclable polypropylene (PP).



DECORATION AVAILABLE

- **Container:**
Full wrap IML
- **Lid:**
Full or partial IML

MINIMUM ORDERS INFORMATION

For details on minimum order quantities or for any other additional information, please contact IPL customer care at 1-800-463-0270 or visit our web site at www.ipl-plastics.com.

COLOR CODE

BASE COLORS	STANDARD COLORS	OTHER COLORS
Natural 000	Black 099	Available upon request
White 001	Yellow 012	
	Orange 021	
	Red 485	
	Green 377	
	Blue 293	



Our containers are 100% recyclable because at IPL, we care about the environment.






CONTAINERS

PRODUCT CODE	MODEL	CAPACITY UNDER LID		APPROX. WEIGHT		A OVERALL HEIGHT		B OVERALL DIAMETER		ITEMS PER BOX	BOXES PER PALLET	ITEMS PER PALLET	ITEMS PER 53 FT. TRUCKLOAD
		US oz.	ml	oz.	g	in.	mm	in.	mm				
26323	18 oz. / 500g	18.9	560	0.56	15.9	3.35	85.1	4.56	115.8	820	20	16,400	278,800
28523	26 oz. / 650g	26.2	775	0.83	23.6	5.04	128	4.56	115.8	525	25	13,125	249,375

* Development possible for other sizes

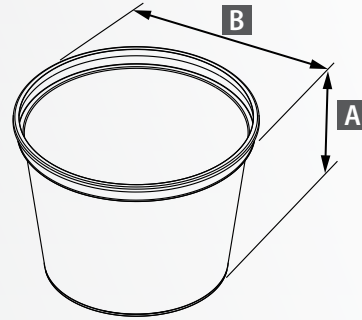

LID

PRODUCT CODE	MODEL - ASSOCIATED CONTAINERS	APPROX. WEIGHT		HEIGHT		DIAMETER		ITEMS PER BOX	BOXES PER PALLET	ITEMS PER PALLET
		oz.	g	in.	mm	in.	mm			
20123	Fits both sizes of container	0.26	7.44	0.45	11.4	4.6	116.8	1,050	24	25,200

RECOMMENDATIONS

Handling conditions vary from customer to customer. We recommend validating your processes (filling, conveying, warehousing and any others that might affect the purchased part) prior to use. Product usage temperature is between -9.4°F (-23°C) and 179.6°F (82°C) depending on resin grade.

WARRANTIES

- Some chemicals can affect the integrity of the product. Any product requiring a Safety Data Sheet (SDS) has to be submitted and approved by IPL. If buyer fails to adhere to this clause, the related product guarantees will be void.
- Specifications may vary slightly over time. Please contact your IPL representative to ensure you have the most recent information.
- The information presented herein was prepared at IPL Inc. by qualified technical personnel. To IPL's knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user will independently determine that the product is suitable for the intended use, and that such use, complies with all applicable laws and regulations. The data represents typical values submitted only for the user's information and consideration and does not constitute a warranty of any kind.

